


FAST EXCHANGING PLATFORMS DUAL-USE FOR PLATE AND TUBE

Exchange Platform Dual-use Laser Cutting Machine E-T

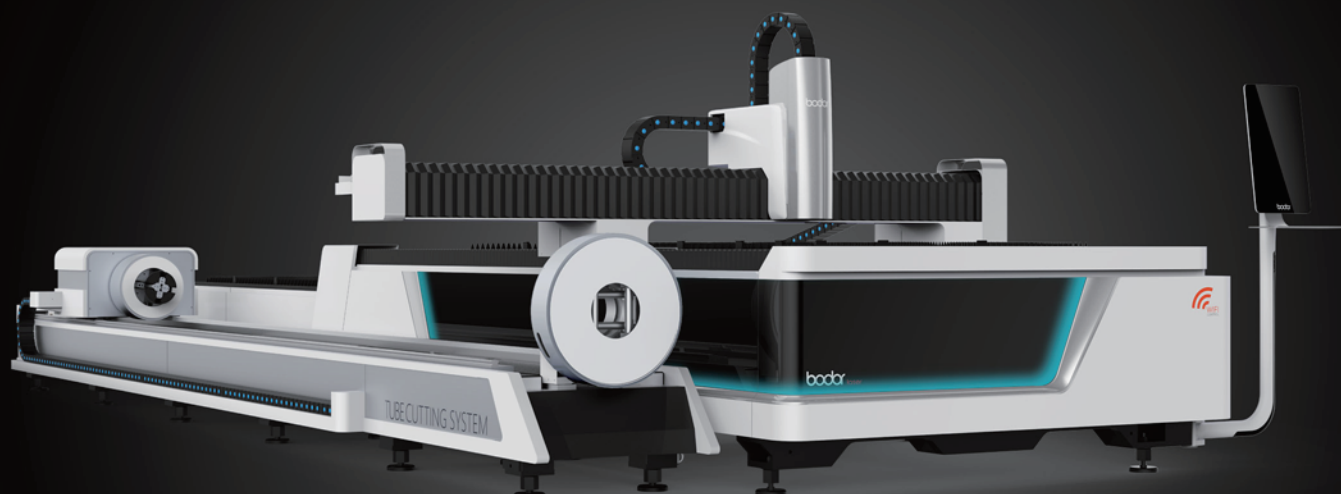

Exchange Platform Dual-use Laser Cutting Machine E-T


The equipment meets the parts processing requirements of most industries, working accuracy is stable. Selecting the optimal force and supporting structure, the overall mechanical property of equipment is perfect. Adopting cutting-edge optical concept to improve cutting performance. High speed cutting, auxiliary loading and unloading and efficient production reduce labor costs. At present, laser cutting machines have been widely used in electronics, electrical, mechanical hardware, new energy lithium, packaging, solar, LED, automotive and other industries.

Product parameters

Model	E3015T	E4020T	E6020T
Working Area	3000*1500mm	4000*2000mm	6100*2000mm
Laser Power	6000w/4000w/3000w/2000w/1500w/1000w		
Effective Pipe Cutting Diameter	Φ20-Φ230mm		
Effective Square Tube Cutting Diameter	□20*20-□160*160mm		
Lorem Ipsum	Min. Side Length	≥20mm	
	Max. Circumcircle Diameter	≤230mm	
Effective Pipe Cutting Length	3m/6m		
X/Y/U-axis Positioning Accuracy	0.05mm		
X/Y/U-axis Repositioning Accuracy	0.03mm		
Max. linkage speed	100m/min		

For more information, please go to the website : www.bodor.com

DUAL-PLATFORM AUTOMATIC EXCHANGE SYSTEM

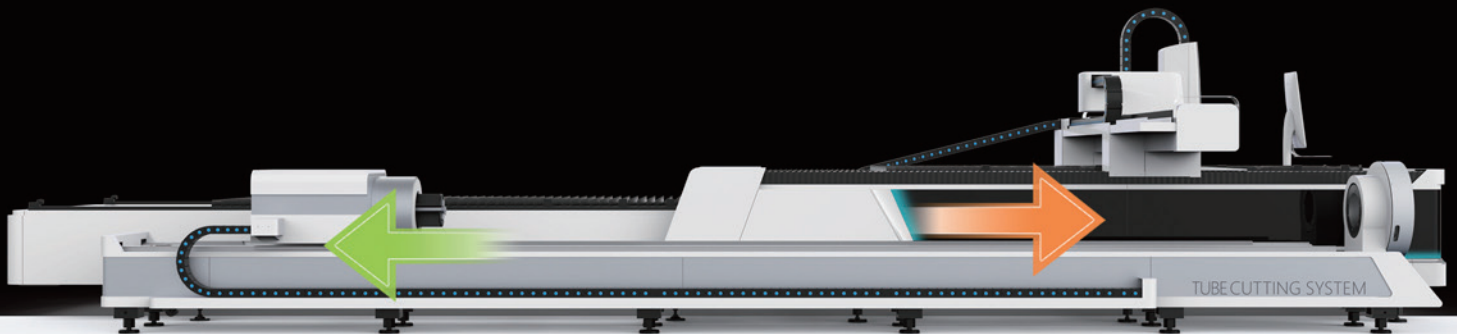


Exchange Table Plate & Tube Fiber Laser Cutting Machine

Gear drive reduces loading time, exchange in 10 seconds.

Rapid exchange between two platforms greatly improves work efficiency.

SELF-CENTERING CHUCK

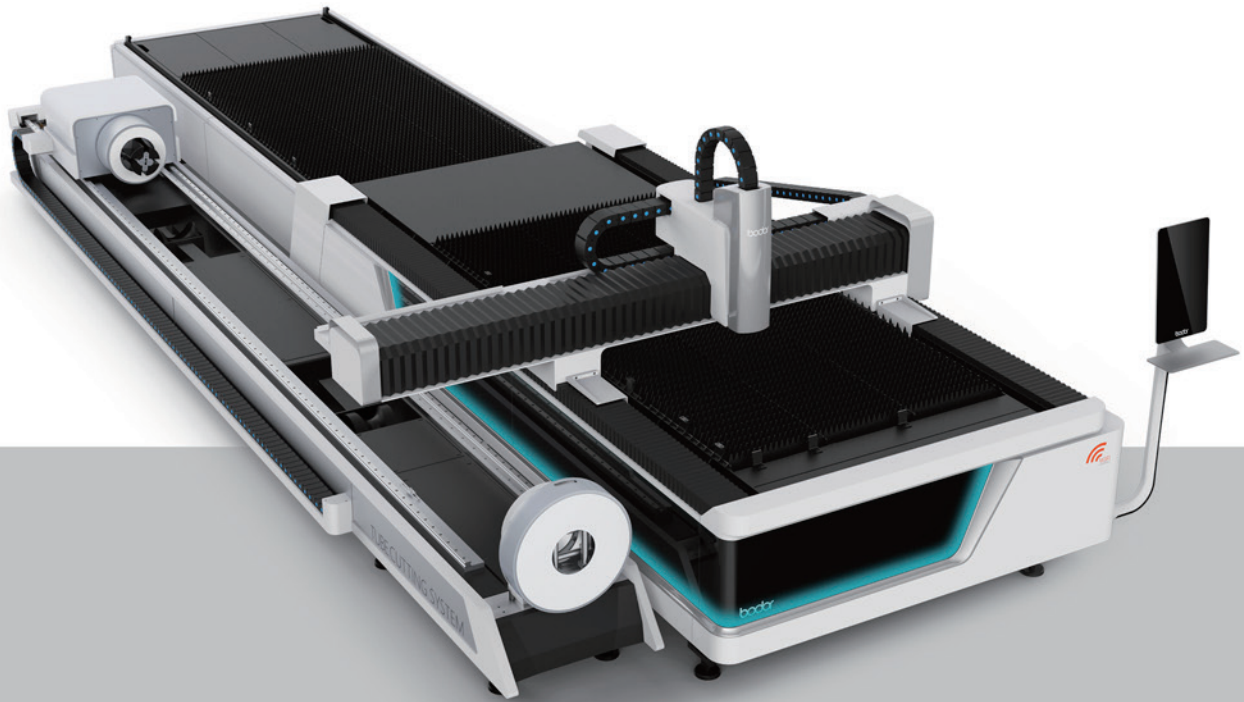

Self-centering Chuck

DC motor driven jaws, fast automatic centering and clamping pipe, stable performance, wide clamping range, strong clamping force.

Smaller chuck size, lower rotating inertia, stronger dynamic performance.

Gear transmission mode, higher transmission efficiency, long working life span and high reliability.

CAST IRON BED


A CAST IRON BED LAST FOREVER



Material is more suitable



Technique is more suitable

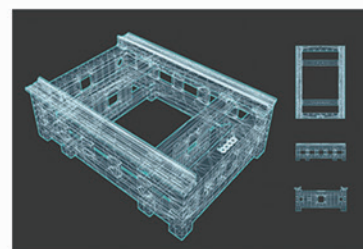

Structure is more reasonable

Clone production

Pouring Mold, clone production; integrally formed, reject splicing

Durable

The usage of flake graphite with the lowest tensile strength of 200MPa gives the whole equipment strong shock absorption, wear resistance, high hardness, high carbon content, high compressive strength.

Low notch sensitivity and thermal sensitivity of cast iron bed reduces the loss of equipment in using, keeps the precision of cutting unchanged permanently and no deformation in its life cycle.



AUTOMATIC FOCUSING FUNCTION OF LASER HEAD

Auto focus

Applicable to multiple focal lengths, automatically adjusts focal position in cutting process by different sheet thickness.

Free your hands

Focal length is controlled by operating system, which effectively avoids errors or faults caused by manual operation.

Simple and fast


Applying Bodor lightning perforation technology reduce almost 90% work time. When technician changes different metal sheet, Auto focus laser head can automatically read system storage parameters, which make the cutting process less gas, less electricity, lower cost, high efficiency.

Accurate

By setting perforation focal length and cutting focal length respectively, the cutting is more accurate.

Durable

By increasing collimation & focus protective lens, the key components can be protected. Built-in double water-cooling structure ensures constant temperature of collimating and focusing components, prevents lenses from overheating and prolongs service life of lenses.

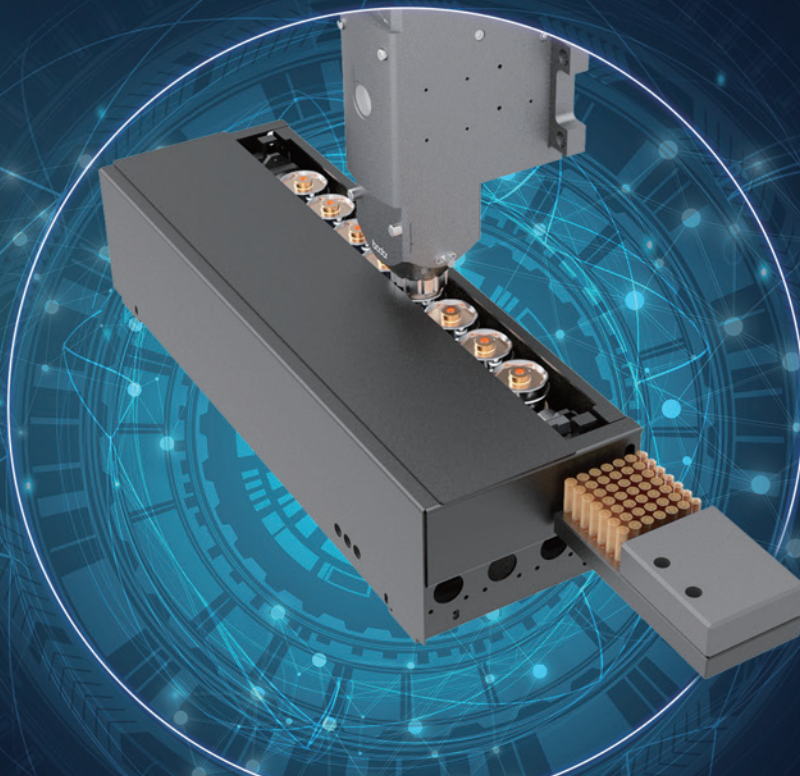

AUTOMATIC NOZZLE CHANGER



Automatic Cleaning



Automatic Replacement



Automatic Calibration

Automatic Nozzle Changer, Let Machine Know More About You

Adopting abundant and accurate control system can realize automatic replacement of nozzles according to different materials and thicknesses, saving manual replacement time and improving processing efficiency, smart and convenient; Newest automatic calibration and cleaning functions can achieve fully automatic laser head calibration and nozzle cleaning, reducing the repetitive manual work; High-precision drive system provides a reliable replacement precision and stability to ensure that every replacement can be perfectly safe. Fully enclosed protection of the whole part improves the safety of parts and personal.

Automatic Obstacle Avoidance



Intelligent anti-collision

360°radar system can detect any obstacles in advance, and Z axis high-speed motion will be activated to immediately avoid obstacles, avoiding collisions.



Higher Efficiency, Lower Cost

This function Lowers the damage rate of laser head, and accordingly reduces maintenance cost, prolonging service life of the machine. Avoid production halt caused by collisions, ensuring continuous production.

MANGO 

Mango wireless remote control handle



Mango wireless remote control handle

Mango shape, elegant curve, use with one hand,
magnetic attraction design.





TOUCH CONTROL

Elegant appearance curve

The new 21.5 inch touch display with larger area and more convenient operation. 10 touch points ensures more operation accuracy.



Intelligent WIFI Remote Assistance

Global real-time feedback provides fault analysis and troubleshooting in time.




Auxiliary Gas Low Pressure Alarm Function

Auxiliary Gas Low Pressure Alarm Function

Providing real-time pressure detection and reporting abnormal information ensure cutting effect , precision and timely replace gas

CAST ALUMINUM CROSSBEAM

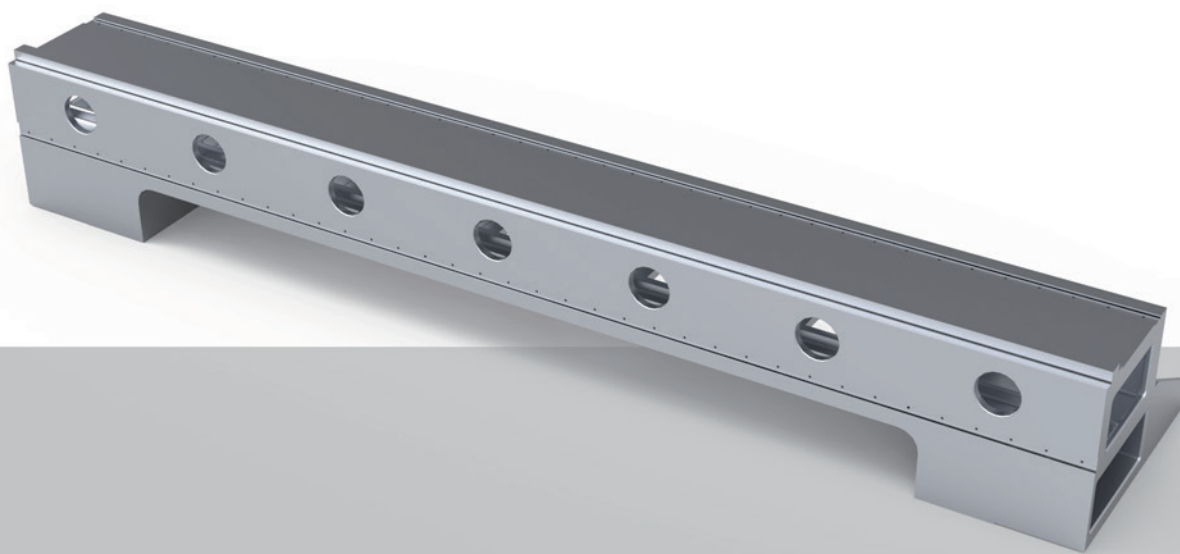


Cast aluminum crossbeam

Integral Pressure Casting by Steel Mold Makes It Light, Flexible and Efficient

Solution treatment and fine finishing give the crossbeam desirable integrity, rigidity, surface quality as well as toughness and ductility. The light weight and strong rigidity of aluminum alloy are suitable for high speed movement during processing, and the high flexibility is beneficial to high-speed cutting of various graphics if the cutting accuracy is ensured. Light crossbeam offers high operation speed, improving efficiency and ensuring quality.


Bodor Pro 2.0

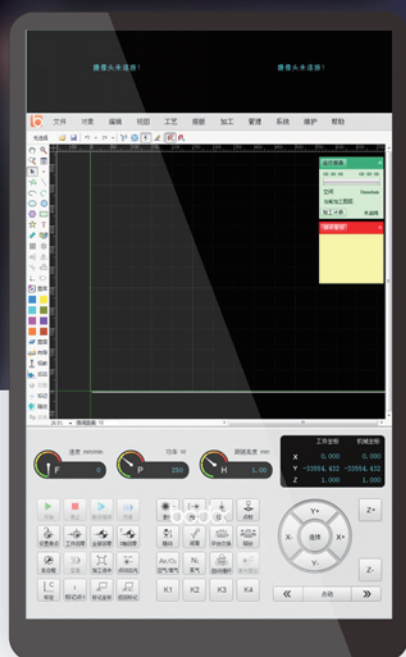

Bodor Pro 2.0

Independent R&D operating system offers simple interface and operation method, supports input of multiple types of graphics, automatically optimizes cutting orders, intelligently search-edges, and has automatic positioning function.


E3015T • FLOOR PLAN

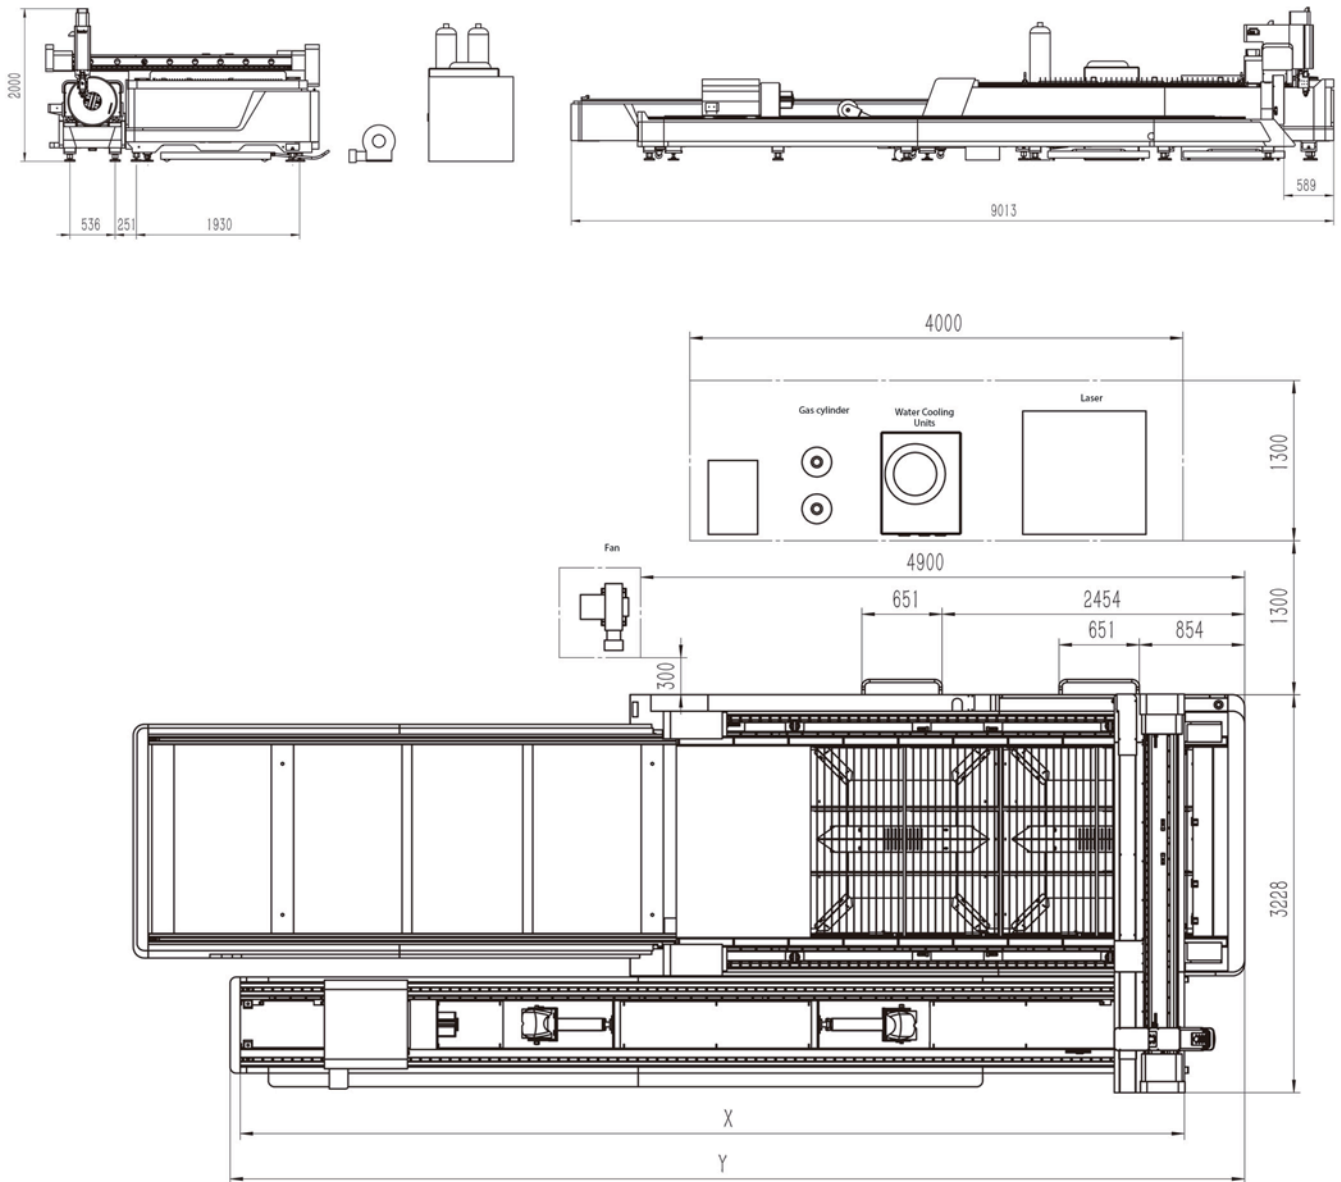

PLACING REQUIREMENT

1. The whole machine should keep away from obstacles at least 1m
2. The whole machine should be far away from the hypocenter
3. The planeness of placing field should be less than 5mm
4. Voltage fluctuation of the whole machine should be kept in $\pm 5\%$


E4020T • FLOOR PLAN

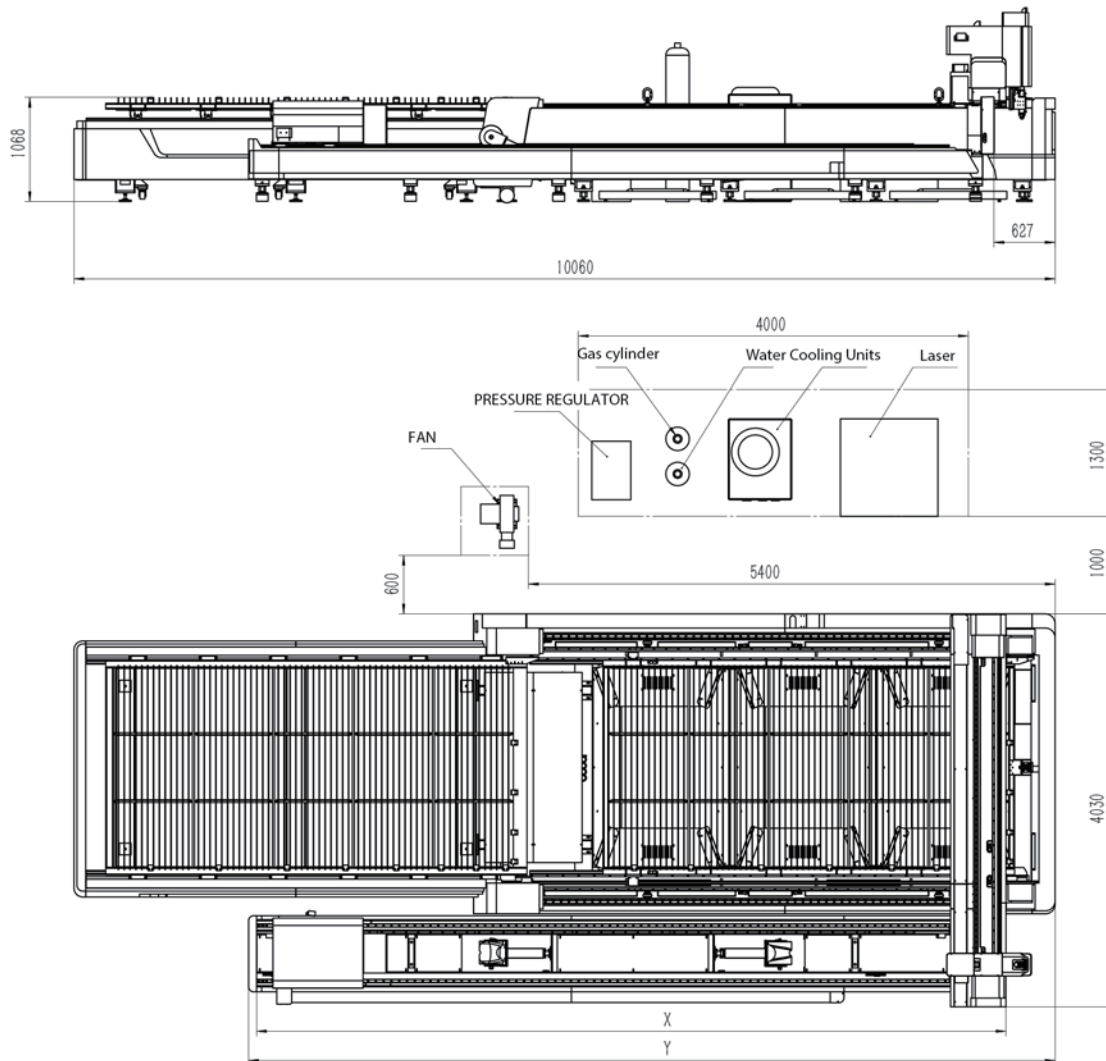

PLACING REQUIREMENT

1. The whole machine should keep away from obstacles at least 1m
2. The whole machine should be far away from the hypocenter
3. The planeness of placing field should be less than 5mm
4. Voltage fluctuation of the whole machine should be kept in $\pm 5\%$


Cutting Capacity

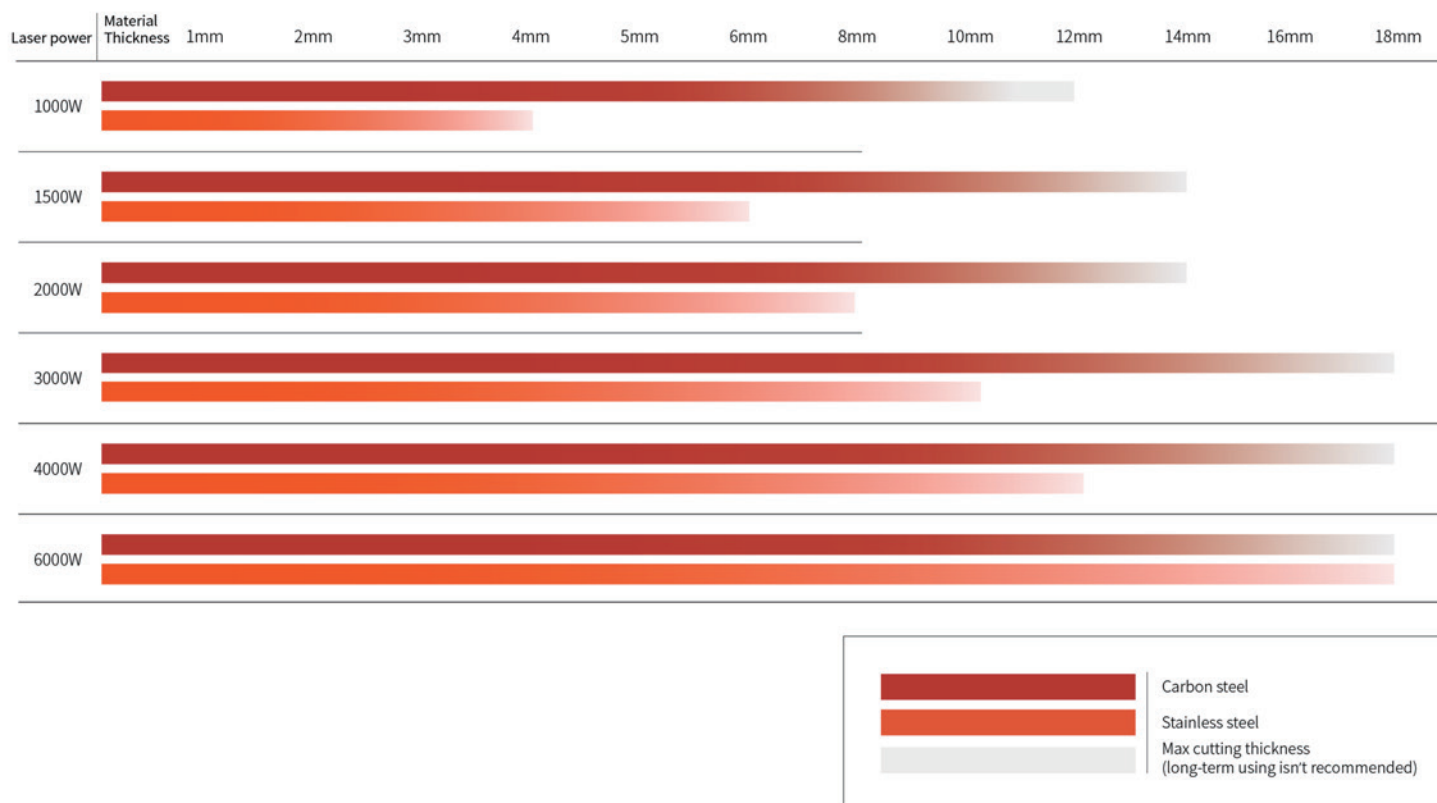

Above data is only for reference

Fiber Laser Cutting Process Parameters

		1000W	MAX-1000W(25um)	1500W	2000W	MAX-2000W(50)	YLR-2000W	3000W	MAX-3000W(50)	4000W	MAX-4000W(50)	IPG 6000W	MAX 6000W	8000W
Material	Thickness	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min	speed m/min
Carbon steel (Q235A) O2	1	8.0~10	8.0~10	8.0~10	8.0~10	8.0~10	8.0~10	8.0~10	8.0~10	8~10	8~10	8~10	8~10	
	2	4.0~6.5	4.5~7.0	4.5~6.5	4.7~6.5	4.7~6.5	4.7~6.5	4.8~7.5	4.8~7.5	5~7.5	5~7.5	5~7.5	5~7.5	
	3	2.4~3.0	2.4~3.0	2.6~4.0	3.0~4.8	3.0~4.8	3.0~4.8	3.3~5.0	3.3~5.0	3.5~5.0	3.5~5.0	3.5~5	3.5~5	
	4	2.0~2.4	2.0~2.4	2.5~3.0	2.8~3.5	2.8~3.5	2.8~3.5	3.0~4.2	3.0~4.2	3.0~4.0	3.0~4.0	3.0~4.5	3.0~4.5	
	5	1.5~2.0	1.5~2.0	2.0~2.5	2.2~3.0	2.2~3.0	2.2~3.0	2.6~3.5	2.6~3.5	2.7~3.6	2.7~3.6	3.0~4.2	3.0~4.2	
	6	1.4~1.6	1.4~1.6	1.6~2.2	1.8~2.6	1.8~2.6	1.8~2.6	2.3~3.2	2.3~3.2	2.5~3.4	2.5~3.4	2.5~3.5	2.5~3.5	
	8	0.8~1.2	0.8~1.2	1.0~1.4	1.2~1.8	1.2~1.8	1.2~1.8	1.8~2.6	1.8~2.6	2.0~3.0	2.0~3.0	2.2~3.2	2.2~3.2	
	10	0.6~1.0	0.6~1.0	0.8~1.1	1.1~1.3	1.1~1.3	1.1~1.3	1.2~2.0	1.2~2.0	1.5~2.4	1.5~2.4	1.8~2.5	1.5~2.2	
	12	0.5~0.8	0.5~0.8	0.7~1.0	0.9~1.2	0.9~1.2	0.9~1.2	1.0~1.6	1.0~1.6	1.2~1.8	1.2~1.8	1.2~2.0	1.2~2.0	
	14			0.5~0.7	0.7~0.8	0.7~0.9	0.8~1.0	0.9~1.2	0.9~1.2	0.9~1.2	0.9~1.2	1.2~1.8	1.0~1.5	
	16				0.6~0.7	0.6~0.8	0.6~0.8	0.7~1.0	0.7~1.0	0.8~1.0	0.8~1.0	0.8~1.3	0.7~1.2	
	18				0.4~0.6	0.5~0.7	0.5~0.7	0.6~0.8	0.6~0.8	0.6~0.9	0.6~0.9	0.6~0.9	0.6~0.9	
	20							0.5~0.8	0.5~0.7	0.5~0.8	0.5~0.8	0.5~0.8	0.5~0.8	
	22							0.3~0.7	0.3~0.7	0.4~0.8	0.4~0.8	0.4~0.8	0.4~0.6	
	25											0.3~0.55	0.2~0.5	
Stainless steel (201) N2	1	18~25	24~36	20~27	24~30	24~50	24~50	30~35	30~58	32~45	40~72	42~52	42~52	No support
	2	5~7.5	6~10	8.0~12	9.0~12	9.0~14	9.0~15	13~21	13~39	16~28	24~45	20~33	20~33	
	3	1.8~2.5	2.2~3.5	3.0~5.0	4.0~6.5	4.0~7.0	4.8~7.5	6.0~10	6~14	7.0~15	7.0~18	15~22	15~22	
	4	1.2~1.3	1.2~1.6	1.5~2.4	3.0~4.2	3.2~4.5	3.2~4.5	4.0~6.0	4.0~7.0	5.0~8.0	6.0~10.0	10~15	10~15	
	5	0.6~0.7	0.6~0.75	0.7~1.3	1.8~2.5	2.0~2.8	2.0~2.8	3.0~5.0	3.0~5.0	3.5~5.0	4.0~5.0	8.0~12	6.5~8.0	
	6			0.7~1.0	1.2~1.8	1.2~2.0	1.2~2.0	2.0~4.0	2.0~4.0	2.5~4.5	3.0~4.5	4.8~8.0	4.2~6.0	
	8				0.7~1.0	0.7~1.0	0.7~1.0	1.5~2.0	1.5~2.0	1.6~2.0	1.6~2.0	3.0~4.0	2.5~3.5	
	10							0.6~0.8	0.6~0.8	0.8~1.2	0.8~1.2	1.6~2.5	1.2~2.0	
	12							0.4~0.6	0.4~0.6	0.5~0.8	0.5~0.8	0.8~1.5	0.8~1.5	
	14									0.4~0.6	0.4~0.6	0.6~0.8	0.5~0.8	
	16											0.5~0.8	0.4~0.7	
	18											0.4~0.6	0.3~0.6	
	20											0.3~0.5	0.2~0.5	
	25											0.2~0.4	0.2~0.4	
Aluminum N2	1	6.0~10	6.0~10	10~20	15~25	15~25	20~30	25~38	25~40	35~45	35~45	42~55	42~55	No support
	2	2.8~3.6	2.8~3.6	5.0~7.0	7~10	7~10	10~15	10~18	13~20	13~24	13~24	20~40	20~40	
	3	0.7~1.5	0.7~1.5	2.0~4.0	4.0~6.0	4.0~6.0	5.0~7.0	6.5~8.0	6.5~8.0	7.0~13	7.0~13	15~25	15~25	
	4			1.0~1.5	2.0~3.0	3.5~4.0	3.5~5.0	3.5~5.0	3.5~5.0	4.0~5.5	4.0~5.5	9.5~12	9.5~12	
	5			0.7~1.0	1.2~1.8	1.2~1.8	1.8~2.5	2.5~3.5	2.5~3.5	3.0~4.5	3.0~4.5	5.0~8.0	5.0~8.0	
	6				0.7~1.0	1.0~1.5	1.0~1.5	1.5~2.5	1.5~2.5	2.0~3.5	2.0~3.5	3.8~5.0	3.8~5.0	
	8				0.6~0.8		0.6~0.8	0.7~1.0	0.7~1.0	0.9~1.6	0.9~1.6	2.0~2.5	2.0~2.5	
	10							0.4~0.7		0.6~1.2	0.6~1.2	1.0~1.5	1.0~1.5	
	12							0.3~0.45		0.4~0.6		0.8~1.0	0.8~1.0	
	16									0.3~0.4		0.5~0.8	0.5~0.8	
	20											0.5~0.7		
	25											0.3~0.5		
Brass N2	1	6.0~10	6.0~10	8.0~13	10~16	10~16	12~18	20~35	20~35	25~35	25~35	35~45	35~45	No support
	2	2.8~3.6	2.8~3.6	3.0~4.5	4.5~7.5	5.0~6.0	6.0~8.5	6.0~10	6.0~10	8.0~12	8.0~12	20~30	20~30	
	3	0.5~1.0	0.5~1.0	1.5~2.5	2.5~4.0	2.5~4.0	2.5~4.0	4.0~6.0	4.0~6.0	5.0~8.0	5.0~8.0	12~18	12~18	
	4			1.0~1.6	1.5~2.0	2.0~3.0	2.0~3.0	3.0~5.0	3.0~5.0	3.2~5.5	3.2~5.5	5.0~8.0	5.0~8.0	
	5			0.5~0.7	0.9~1.2		0.9~1.2	1.5~2.0	1.5~2.0	2.0~3.0	2.0~3.0	4.5~6.0	4.5~6.0	
	6				0.4~0.7		0.4~0.9	1.0~1.8	1.0~1.8	1.4~2.0	1.4~2.0	3.0~4.5	3.0~4.5	
	8							0.5~0.7		0.7~1.2		1.6~2.2	1.6~2.2	
	10									0.2~0.5		0.8~1.2	0.8~1.2	
	12											0.3~0.5	0.3~0.5	
	14											0.3~0.4	0.3~0.4	
	16													
	18													
	20													
	25													
	30													
	35													

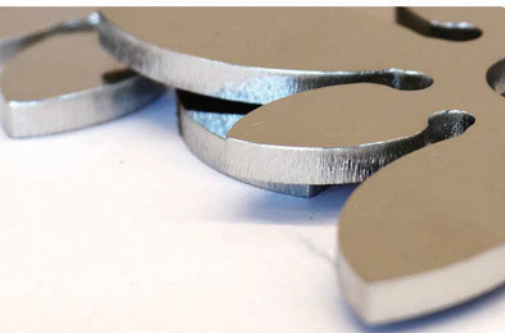


Metal Samples

For more information, please go to the website : www.bodor.com



OFFICE

For more information, please go to the website : www.bodor.com

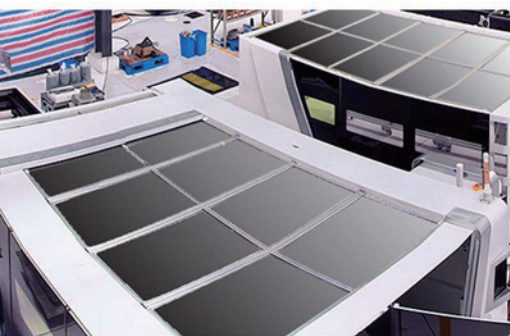

WORKSHOP

For more information, please go to the website : www.bodor.com